



TROLL® 9500 Multiparameter Instrument



The powerful, portable TROLL 9500 Water Quality Instrument is designed for groundwater and surface water monitoring. The unit houses up to nine water quality sensors, internal power, and optional data logger.

Lower Total Cost of Ownership

- Instrument saves time and money by offering long-lasting internal power, automated low-flow sampling, and telemetry accessibility.
- Field-proven sensors and antifouling system reduce maintenance and site visits.
- Intuitive Win-Situ® 4 Software and Flow-Sense Software improve efficiency by simplifying data collection and management.

Reliable, Accurate Operation

- Instrument operates in fresh, waste, and marine waters.
- Instrument offers proven performance. Rigorous third-party testing shows that the TROLL 9500 delivers consistent results.
- Sensors are factory calibrated with NIST®-traceable standards (where applicable).

Outstanding Customer Service

- Free, 24/7 technical support
- Seven-day service for maintenance and calibration (U.S.A. only)

Logging Models

- **LTS:** LTS stands for “Level, Temperature, and one additional Sensor,” such as conductivity, dissolved oxygen (DO), or pH.
- **Professional:** This unit offers the highest value for most applications. Instrument allows for several sensors, including conductivity/salinity, DO, ORP, pH, temperature, or depth.
- **Professional XP:** The most capable TROLL 9500 offers features available on the Professional and supports XP or “Extended Parameter” sensors—turbidity, ammonium, chloride, or nitrate.

Non-Logging Models

- **Profiler:** Ideal for sampling or vertical profiling, this unit is similar to the Professional, but does not include memory or logging capabilities. Data can be logged to a RuggedReader® Handheld PC or laptop.
- **Profiler XP:** This unit offers the same features as the Profiler with the option to use XP sensors.

Applications

- Coastal deployments—estuaries and wetlands
- Environmental monitoring and spot checking
- Low-flow groundwater sampling
- Remediation and mine water monitoring
- Stormwater management
- Vertical profiling

TROLL® 9500 Water Quality Sensors

Customizable for Your Application



Choose from several field-ready sensors. The selected sensor set will determine the diameter of the TROLL 9500—sub-2 inch or sub-4 inch.

- **Barometric pressure:** Use this sensor to compensate water level and DO values.
- **Conductivity:** Characterize water quality in actual conductivity, specific conductivity, salinity, TDS, or specific gravity.
- **DO:** Choose from the optical Rugged Dissolved Oxygen (RDO®) Sensor or Clark cell.
- **Level/Pressure:** Non-vented and vented sensors are available for several ranges.
- **Nutrients:** Choose from ion-selective electrodes for ammonium, chloride, or nitrate.
- **pH or pH/ORP:** Extend field use with durable sensors. The re-buildable pH sensor outlasts traditional sensors.
- **Temperature:** Compensate conductivity, DO, pH, and nutrient data with this fast, accurate sensor.
- **Turbidity or Turbidity/Level:** Comply with ISO standards. The turbidity sensor uses ISO 7027 method. Optional wiper is available for high-fouling sites or for lengthy deployments.



Optical RDO Sensor

Breakthrough RDO technology surpasses Clark cell performance by eliminating hydration effects, membranes, electrolyte solution, and stirring.

- **Rugged performance:** Wiper-free design excels in demanding environments. Abrasion-resistant foil withstands fouling, high sediment loads, and rapid flow rates. No photobleaching effects.
- **Automatic setup:** RDO Cap with pre-loaded calibration coefficients simplifies setup and eliminates programming errors.
- **Accurate results:** Operates with low drift over long-term deployments. Excels in hypoxic conditions. Responds quickly and maintains stable response.
- **Long-lasting calibration:** Deploys for several months if sensor fouling is minimal and if the foil is not damaged or removed.
- **Minimal interferences:** Sensor is unaffected by sulfides, sulfates, hydrogen sulfide, carbon dioxide, ammonia, pH, or chloride.
- **Fast response:** Ideal for vertical profiling and dynamically changing conditions.



TROLL 9500 Accessories



TROLL® Shield Antifouling System

The TROLL Shield Guard slows biofouling on TROLL 9500 sensors. The guard extends instrument deployments in coastal environments and at high-fouling sites by up to six weeks.

DO Field Bubbler Kit

For accurate results, use the DO Bubbler Kit for air-saturated water calibrations. The kit reduces time spent on calibration setup.

Calibration Solutions

From easy-to-use Quick Cal Solution to NIST®-traceable standards, In-Situ supplies calibration solutions required to get accurate results. Call for details or visit www.in-situ.com.

RuggedCable® Systems, Reels, & Well Accessories

RuggedCable Systems endure harsh environments and last for years. Titanium twist-lock connectors and Kellems® grip are included. Vented or non-vented cable is available in either Tefzel® or polyurethane. Order customized lengths up to 1,219 m (4,000 ft). Steel or plastic reels make deployment of long cables manageable. Ask us about well-docking accessories.




Real-Time Monitoring for Remediation



Conduct ISCO, ISCR, Biosparging, Air Sparging & More

The TROLL® 9500 Instrument supports real-time measurement of performance indicators, which allows for a dynamic work strategy per the EPA Triad Approach to site remediation. You can adapt to changing conditions as new data becomes available. This allows you to complete projects more quickly and at a lower cost than when using traditional approaches. The TROLL 9500:

- Features sub-2 inch configuration for key parameters: DO with the RDO® Sensor, conductivity, pH/ORP, temperature, and barometric pressure
- Deploys in harsh conditions. The corrosion-resistant housing is suitable for many remediation applications.
- Reduces grab sampling and labor costs while improving safety when working with treatment chemicals
- Improves performance and reduces maintenance when deployed with the RDO Sensor
- Connects to the TROLL® Link Telemetry System for remote access and external power

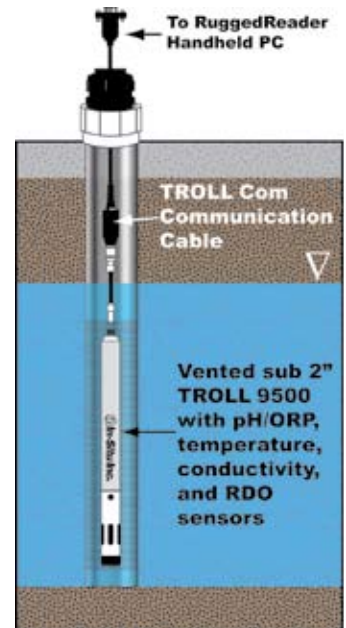

TROLL 9500 Low-Flow Sampling System

You can use the TROLL 9500 System with Flow-Sense Software to conduct low-flow purging and sampling. You will collect representative samples, minimize contaminant volatilization, and reduce hazardous waste disposal. To improve efficiency in the field, the system:

- Automates collection of well and pumping information
- Monitors and records stabilization of key water quality parameters
- Automatically generates defensible calibration and sample reports that conform to federal and regional regulations
- Eliminates transcription time and errors

Automated Test Setup

Flow-Sense Software retains all project information—well data, pump performance specifics, tubing details, pumping rate, stabilized drawdown, and parameter stabilization criteria. You can quickly access site information at subsequent sampling events without reentering data.

Win-Situ® Sync Software automatically copies well records and data between a computer and a RuggedReader® Handheld PC.

Automated Data Collection

Stabilization criteria are set for each monitored parameter. Data collection intervals are defined by time or pumped volumes. During sampling, software calculates and displays variance and targets for each parameter. Data is logged at pre-determined intervals and stabilization is achieved when readings meet variation criteria. In addition, you can view data numerically or graphically.



Automated Test Report Generation

After stabilization, stored data can be exported into Excel®. Flow-Sense Software automatically generates full calibration and sample reports that conform to federal and regional regulations. To save time, simply reuse templates at subsequent sampling events.

Sales & Support

Intermountain Environmental
(800) 948-6236 or (435)755-0774
<http://www.inmtn.com>
info@inmtn.com

